

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014172 A1

(51) International Patent Classification⁷: **B01L 3/00**,
F16K 21/08

(21) International Application Number:
PCT/GB2004/003389

(22) International Filing Date: 4 August 2004 (04.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0318359.7 5 August 2003 (05.08.2003) GB

(71) Applicant (for all designated States except US): **E2V
TECHNOLOGIES (UK) LIMITED** [GB/GB]; 106
Waterhouse Lane, Chelmsford, Essex CM1 2QU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALLEN, Brian,
Philip** [GB/GB]; 30 Church Lane, Toppesfield, Essex

CO9 4DS (GB). **ZHOU, Xiao-Feng** [GB/GB]; 53 Barlows
Reach, Chelmsford, Essex CM2 6SN (GB). **GILBERT,
Richard** [GB/GB]; 3 Riverbank Court, Shrublands Close,
Chelmsford, Essex CM2 6WY (GB).


(74) Agent: **LOVELESS, Ian, Mark**; Reddie & Grose, 16
Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: MICROFLUIDIC VALVE

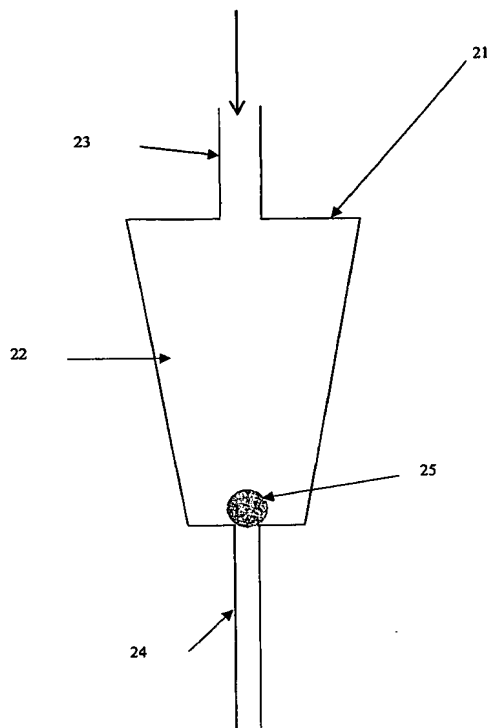

(57) Abstract: The invention provides a microfluidic valve comprising a first body for containing fluid having a fluid inlet and a fluid outlet and a plurality of electrodes, and arranged to contain, in use, a second body held within fluid contained in the first body, the second body being moveable toward or away from one of the fluid inlet or fluid outlet, the movement of the second body caused by a phase difference in the electric field generated by the electrodes, such that fluid flow into or out of the first body is controlled. The fluid flow is controlled using one of the dielectrophoretic, electrophoretic or electroosmotic effects. The invention also provides a method of controlling fluid flow, and a microfluidic switch, and microfluidic chip and a diagnostic device, wherein fluid flow is controlled in each.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,*

ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.